



The World Leader in Vibrating Wire Technology

48 Spencer Street
Lebanon, NH 03766, USA
Tel: 603•448•1562
Fax: 603•448•3216
E-mail: geokon@geokon.com
<http://www.geokon.com>

Installation Manual
Model 3800/3810
Thermistors & Thermistor Strings

No part of this instruction manual may be reproduced, by any means, without the written consent of Geokon, Inc.

The information contained herein is believed to be accurate and reliable. However, Geokon, Inc. assumes no responsibility for errors, omissions or misinterpretation. The information herein is subject to change without notification.

Copyright ©, 2009 by Geokon, Inc.

(Doc Rev C, 8/14)

Warranty Statement

Geokon, Inc. warrants its products to be free of defects in materials and workmanship, under normal use and service for a period of 13 months from date of purchase. If the unit should malfunction, it must be returned to the factory for evaluation. Upon examination by Geokon, if the unit is found to be defective, it will be repaired or replaced at no charge. However, the WARRANTY is VOID if the unit shows evidence of having been tampered with or shows evidence of being damaged as a result of excessive corrosion or current, heat, moisture or vibration, improper specification, misapplication, misuse or other operating conditions outside of Geokon's control.

Components which wear or which are damaged by misuse are not warranted. This includes fuses and batteries.

Geokon manufactures scientific instruments whose misuse is potentially dangerous. The instruments are intended to be installed and used only by qualified personnel. There are no warranties except as stated herein. There are no other warranties, expressed or implied, including but not limited to the implied warranties of merchantability and of fitness for a particular purpose. Geokon, Inc. is not responsible for any damages or losses caused to other equipment, whether direct, indirect, incidental, special or consequential which the purchaser may experience as a result of the installation or use of the product. The buyer's sole remedy for any breach of this agreement by Geokon, Inc. or any breach of any warranty by Geokon, Inc. shall not exceed the purchase price paid by the purchaser to Geokon, Inc. for the unit or units, or equipment directly affected by such breach. Under no circumstances will Geokon reimburse the claimant for loss incurred in removing and/or reinstalling equipment.

Every precaution for accuracy has been taken in the preparation of manuals and/or software, however, Geokon, Inc. neither assumes responsibility for any omissions or errors that may appear nor assumes liability for any damages or losses that result from the use of the products in accordance with the information contained in the manual or software.

Contents

1. Introduction.....	1
2. Installation.....	1
3. Readout	1
4. Datalogger Connection.....	1
Figure A-1: Thermistor Bridge Wiring	2
Table B-1: Standard Thermistor Resistance versus Temperature	2
Table B-2: High Temperature Thermistor Resistance versus Temperature.....	3

1. Introduction

Thermistors are semiconductors, which behave as thermal resistors – that is, resistors with a high (usually negative) temperature coefficient of resistance. The thermistor beads are made from a mixture of metal oxides encased in epoxy or glass. The beads are small in size and extremely robust with a high degree of stability over a long life span. Because their resistance change is so great, it is unusual for cable effects to be significant. However, for high accuracy work the cable resistance can be taken into account. Accuracies of the types of thermistor beads used here is, $\pm 0.5^\circ\text{C}$, (Model 3800-1-1-1), or $\pm 0.2^\circ\text{C}$ (Model 3800-1-2-1). Standard temperature ranges are -50 to 150 degrees C . High temperature versions are -30 to 230 degrees C.

2. Installation

Model 3800-1-1, and Model 3800-1-2 thermistors are supplied inside a housing already potted on the end of a cable ready to be attached to a structure or buried in the ground or in concrete. The potting chamber is made from PVC for low temperature models or from stainless steel for the high temperature models. Model 3810 Thermistor strings are made by removing a short length of the outer jacket of a multi-pair conductor cable, at pre-determined depths; splicing a Model 3800-1-1-1 into one of the pairs of conductors, then waterproofing the splice.

3. Readout

Thermistors can read using either a GK 403 or GK 404 readout box, which display the temperature directly in degrees Celsius. Alternatively, for standard thermistors, rated at -50 to +150 degrees Celsius a digital ohmmeter can be used in conjunction with the Table B1 shown on the next page. High temperature thermistors can be read in a similar manner using Table B2

Note that if long cables are use it may be necessary to correct for the cable resistance. Standard cable is 22 AWG with a resistance of 16 ohms per 1000ft. Remember, when calculating the cable effect to count the distance there and back.

4. Datalogger Connection

A Multiplexer (Model 8032) is required to connect the Model 3810 Thermistor string to a Datalogger (Model 8021/8025). The Common connection of the Thermistor String limits the ability to connect the string directly to a Datalogger. A jumper is required on each channel of the Multiplexer in order to split the Common between all of the Thermistors in the string.

-CR1000/CR800 Wiring for Model 8032 reading Thermistor String in 32ch mode

CR1000/CR800 Datalogger	8032 Multiplexer	Description
12V	12V	12VDC Output
G	G	Power Ground
C#	RES	Control Port # / Reset
C#	CLK	Digital I/O Port # / Clock
AG	AG	Analog Ground
*SE#	1H	Single Ended CH# input for Thermistor
*VX#	1L	Excitation VX#

* NOTE: The Thermistors are read using a Single Ended Channel and Excited with one of the dataloggers excitation channels through a bridge completion circuit.

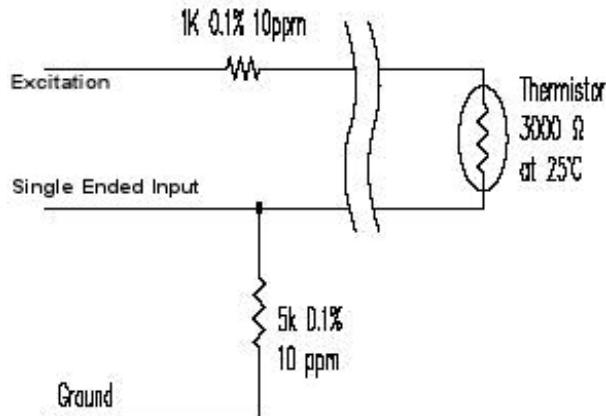


Figure A-1: Thermistor Bridge Wiring

NOTE: The DIP Switches for the 8032 Multiplexer should be set for 32 Channel mode. Each individual Thermistor is connected (with common jumper) as shown below.

Multiplexer Wiring:

8032 Multiplexer	Model 3800/3810
IH	Thermistor Gage 1
1L	Thermistor Common *
2H	Thermistor Gage 2
2L	Thermistor Common *
S	Shield
3H	Thermistor Gage 3
3L	Thermistor Common *

NOTE: * Jumper required

Standard Temperature Thermistor Linearization using SteinHart-Hart Log Equation

Thermistor Type: YSI 44005, Dale #1C3001-B3, Alpha #13A3001-B3

$$\text{Resistance to Temperature Equation: } T = \frac{1}{A + B(\ln R) + C(\ln R)^3} - 273.2$$

Equation B-1: Convert Thermistor Resistance to Temperature

Where: T = Temperature in °C

$\ln R$ = Natural Log of Thermistor Resistance

$A = 1.4051 \times 10^{-3}$ (coefficients calculated over the -50 to +150°C span)

$B = 2.369 \times 10^{-4}$

$C = 1.019 \times 10^{-7}$

Ohms	Temp	Ohms	Temp	Ohms	Temp	Ohms	Temp	Ohms	Temp
201.1K	-50	16.60K	-10	2417	+30	525.4	+70	153.2	+110
187.3K	-49	15.72K	-9	2317	31	507.8	71	149.0	111
174.5K	-48	14.90K	-8	2221	32	490.9	72	145.0	112
162.7K	-47	14.12K	-7	2130	33	474.7	73	141.1	113
151.7K	-46	13.39K	-6	2042	34	459.0	74	137.2	114
141.6K	-45	12.70K	-5	1959	35	444.0	75	133.6	115
132.2K	-44	12.05K	-4	1880	36	429.5	76	130.0	116
123.5K	-43	11.44K	-3	1805	37	415.6	77	126.5	117
115.4K	-42	10.86K	-2	1733	38	402.2	78	123.2	118
107.9K	-41	10.31K	-1	1664	39	389.3	79	119.9	119
101.0K	-40	9796	0	1598	40	376.9	80	116.8	120
94.48K	-39	9310	+1	1535	41	364.9	81	113.8	121
88.46K	-38	8851	2	1475	42	353.4	82	110.8	122
82.87K	-37	8417	3	1418	43	342.2	83	107.9	123
77.66K	-36	8006	4	1363	44	331.5	84	105.2	124
72.81K	-35	7618	5	1310	45	321.2	85	102.5	125
68.30K	-34	7252	6	1260	46	311.3	86	99.9	126
64.09K	-33	6905	7	1212	47	301.7	87	97.3	127
60.17K	-32	6576	8	1167	48	292.4	88	94.9	128
56.51K	-31	6265	9	1123	49	283.5	89	92.5	129
53.10K	-30	5971	10	1081	50	274.9	90	90.2	130
49.91K	-29	5692	11	1040	51	266.6	91	87.9	131
46.94K	-28	5427	12	1002	52	258.6	92	85.7	132
44.16K	-27	5177	13	965.0	53	250.9	93	83.6	133
41.56K	-26	4939	14	929.6	54	243.4	94	81.6	134
39.13K	-25	4714	15	895.8	55	236.2	95	79.6	135
36.86K	-24	4500	16	863.3	56	229.3	96	77.6	136
34.73K	-23	4297	17	832.2	57	222.6	97	75.8	137
32.74K	-22	4105	18	802.3	58	216.1	98	73.9	138
30.87K	-21	3922	19	773.7	59	209.8	99	72.2	139
29.13K	-20	3748	20	746.3	60	203.8	100	70.4	140
27.49K	-19	3583	21	719.9	61	197.9	101	68.8	141
25.95K	-18	3426	22	694.7	62	192.2	102	67.1	142
24.51K	-17	3277	23	670.4	63	186.8	103	65.5	143
23.16K	-16	3135	24	647.1	64	181.5	104	64.0	144
21.89K	-15	3000	25	624.7	65	176.4	105	62.5	145
20.70K	-14	2872	26	603.3	66	171.4	106	61.1	146
19.58K	-13	2750	27	582.6	67	166.7	107	59.6	147
18.52K	-12	2633	28	562.8	68	162.0	108	58.3	148
17.53K	-11	2523	29	543.7	69	157.6	109	56.8	149
								55.6	150

Table B-1: Standard Thermistor Resistance versus Temperature

High Temperature Thermistor Linearization using SteinHart-Hart Log Equation

Thermistor Type: Thermometrics BR55KA822J

$$\text{Basic Equation: } T = \frac{1}{A + B(\ln R) + C(\ln R)^3} - 273.2$$

Where: T = Temperature in °C

$\ln R$ = Natural Log of Thermistor Resistance

$$A = 1.02569 \times 10^{-3}$$

$$B = 2.478265 \times 10^{-4}$$

$$C = 1.289498 \times 10^{-7}$$

Note: Coefficients calculated over -30° to +260° C. span.

Temperature Calculation and Error Table

Temp	R (ohms)	LnR	LnR ³	Calculated Temp	Diff	FS Error	Temp	R (ohms)	LnR	LnR ³	Calculated Temp	Diff	FS Error
-30	113898	11.643	1578.342	-30.17	0.17	0.06	120	407.62	6.010	217.118	120.00	0.00	0.00
-25	86182	11.364	1467.637	-25.14	0.14	0.05	125	360.8	5.888	204.162	125.00	0.00	0.00
-20	65805	11.094	1365.581	-20.12	0.12	0.04	130	320.21	5.769	191.998	130.00	0.00	0.00
-15	50684.2	10.833	1271.425	-15.10	0.10	0.03	135	284.95	5.652	180.584	135.00	0.00	0.00
-10	39360	10.581	1184.457	-10.08	0.08	0.03	140	254.2	5.538	169.859	140.01	-0.01	0.00
-5	30807.4	10.336	1104.068	-5.07	0.07	0.02	145	227.3	5.426	159.773	145.02	-0.02	-0.01
0	24288.4	10.098	1029.614	-0.05	0.05	0.02	150	203.77	5.317	150.314	150.03	-0.03	-0.01
5	19294.6	9.868	960.798	4.96	0.04	0.01	155	183.11	5.210	141.428	155.04	-0.04	-0.01
10	15424.2	9.644	896.871	9.98	0.02	0.01	160	164.9	5.105	133.068	160.06	-0.06	-0.02
15	12423	9.427	837.843	14.98	0.02	0.01	165	148.83	5.003	125.210	165.08	-0.08	-0.03
20	10061.4	9.216	782.875	19.99	0.01	0.00	170	134.64	4.903	117.837	170.09	-0.09	-0.03
25	8200	9.012	731.893	25.00	0.00	0.00	175	122.1	4.805	110.927	175.08	-0.08	-0.03
30	6721.54	8.813	684.514	30.01	-0.01	0.00	180	110.95	4.709	104.426	180.07	-0.07	-0.02
35	5540.74	8.620	640.478	35.01	-0.01	0.00	185	100.94	4.615	98.261	185.10	-0.10	-0.04
40	4592	8.432	599.519	40.02	-0.02	-0.01	190	92.086	4.523	92.512	190.09	-0.09	-0.03
45	3825.3	8.249	561.392	45.02	-0.02	-0.01	195	84.214	4.433	87.136	195.05	-0.05	-0.02
50	3202.92	8.072	525.913	50.01	-0.01	-0.01	200	77.088	4.345	82.026	200.05	-0.05	-0.02
55	2693.7	7.899	492.790	55.02	-0.02	-0.01	205	70.717	4.259	77.237	205.02	-0.02	-0.01
60	2276.32	7.730	461.946	60.02	-0.02	-0.01	210	64.985	4.174	72.729	210.00	0.00	0.00
65	1931.92	7.566	433.157	65.02	-0.02	-0.01	215	59.819	4.091	68.484	214.97	0.03	0.01
70	1646.56	7.406	406.283	70.02	-0.02	-0.01	220	55.161	4.010	64.494	219.93	0.07	0.02
75	1409.58	7.251	381.243	75.01	-0.01	0.00	225	50.955	3.931	60.742	224.88	0.12	0.04
80	1211.14	7.099	357.808	80.00	0.00	0.00	230	47.142	3.853	57.207	229.82	0.18	0.06
85	1044.68	6.951	335.915	85.00	0.00	0.00	235	43.673	3.777	53.870	234.77	0.23	0.08
90	903.64	6.806	315.325	90.02	-0.02	-0.01	240	40.533	3.702	50.740	239.69	0.31	0.11
95	785.15	6.666	296.191	95.01	-0.01	0.00	245	37.671	3.629	47.788	244.62	0.38	0.13
100	684.37	6.528	278.253	100.00	0.00	0.00	250	35.055	3.557	45.001	249.54	0.46	0.16
105	598.44	6.394	261.447	105.00	0.00	0.00	255	32.677	3.487	42.387	254.44	0.56	0.19
110	524.96	6.263	245.705	110.00	0.00	0.00	260	30.496	3.418	39.917	259.34	0.66	0.23
115	461.91	6.135	230.952	115.00	0.00	0.00							

Table B-2: High Temperature Thermistor Resistance versus Temperature.

